



PROFESSIONAL LIFTING EQUIPMENT

# WHEN SAFETY DEPENDS ON PERFORMANCE!

**82300D** 

## 1 Ton Capacity Wheel Dolly

*(Rear swivel caster)*


**82301D** 

## 1 Ton Capacity Wheel Dolly

*(Front & rear swivel casters)*

### INTENDED USE

*For the removal and installation of single, tandem and duplex tires and wheels. Swivel front wheels.*

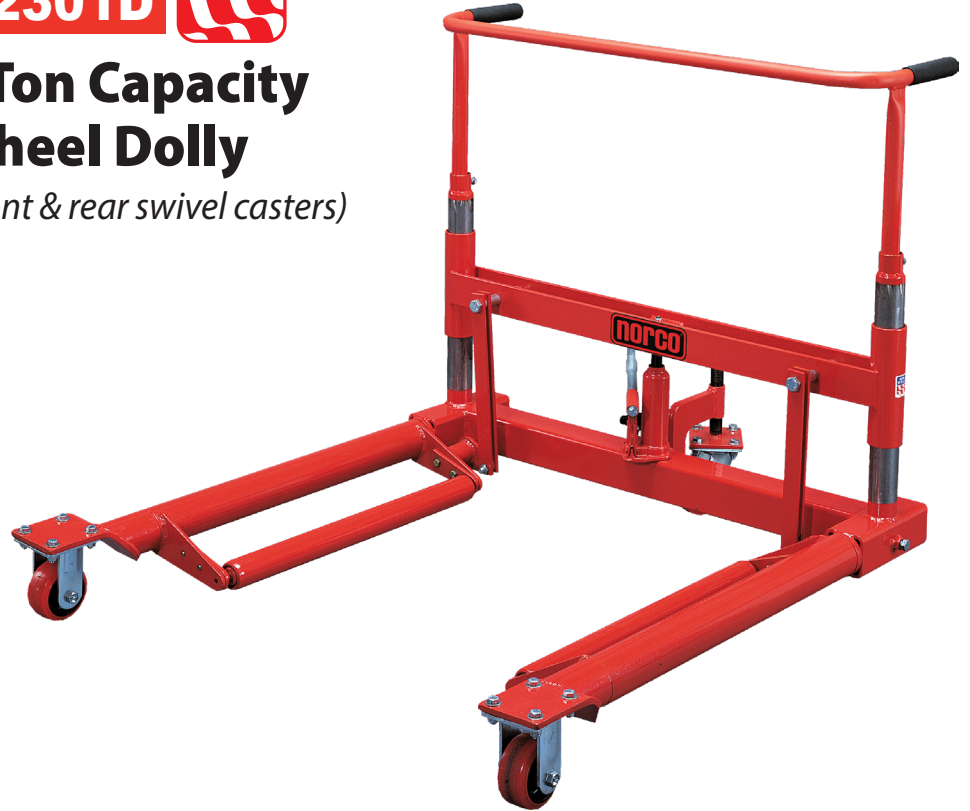

### FEATURES

- Rear swivel caster wheel and rigid front wheels provide positive steering for the model 82300D. Swivel caster wheels both fore and aft provide side to side maneuverability for the model 82301D.
- 4" wheels with polyurethane tread protect floor.
- Lift arms can be adjusted in closer to handle the more common dual wheel combinations and then adjusted outward to handle the larger combinations.
- Lift arms with ball bearing rollers easily rotate vehicle rim for bolt pattern alignment.
- Lift arms supported at both ends minimize wheel movement.
- Adjustable height push bar provides unobstructed access to hub area.
- 3-1/4" travel adjustment on rear caster wheel matches lifting arms with spindle angle.

MODEL NUMBER	CAPACITY	LIFT TRAVEL	OVERALL DIMENSIONS			SHIPPING WEIGHT
			Length	Width	Height	
<b>82300D</b>	<b>1 Ton</b>	7.5"	50.5"	44.5"	39"	207 lbs.
<b>82301D</b>	<b>1 Ton</b>	7.5"	50.5"	44.5"	39"	209 lbs.